

SPAD 502 DATALOGGER MANUAL

CATALOG #2900DL



Spectrum
Technologies, Inc.

CONTENTS

General Overview	3
Identifying the Correct Com Port	4
Data Logger Operation	6
GPS Connection	7
Logger Software	8
Specifications	10
Appendix 1: Time Zone Corrections	11
Service and Support	12
Warranty	13

This manual will familiarize you with the features and operation of your new data logging SPAD meter. Please read this manual thoroughly before using your instrument. For customer support, or to place an order, call Spectrum

Technologies, Inc.

(800)248-8873 or (815) 436-4440

between 7:30 am and 5:30 p.m. CST,

FAX (815)436-4460,

e-mail: info@specmeters.com.

www.specmeters.com

Spectrum Technologies, Inc
12360 S. Industrial Dr. East
Plainfield, IL 60585

GENERAL OVERVIEW


Thank you for purchasing the data logging SPAD Chlorophyll meter from Spectrum Technologies, Inc. This operation manual deals with the features that are unique to the data logging SPAD Chlorophyll meter. Information on general meter operation is contained in the accompanying Instruction manual.

The integrated data logger allows the user to easily collect field data with the SPAD chlorophyll meter. The logger can be used with or without GPS/DGPS. After a set of data has been collected, it is transferred to a PC using Starlogger software. The data is in ASCII text file format and can be exported into mapping software or popular spreadsheet software for analysis.


IDENTIFYING THE CORRECT COM PORT

The computer **Communications Port** to which the PC-3.5 serial cable is connected can be identified by using a paper clip

1. Disconnect the meter from the serial cable.
2. Click on the **Com Port** button on the main software screen. This will bring up the **Port Selection** screen.

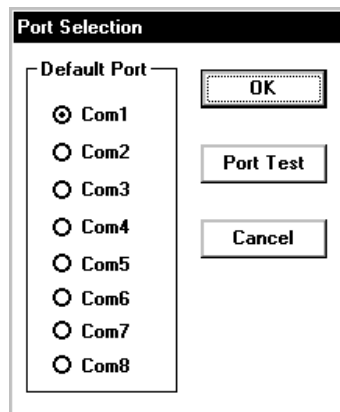

3. Select the Com port to be tested and click on the **Port Test** button. In the **Port Test** screen, click the **Test Port Now** button.

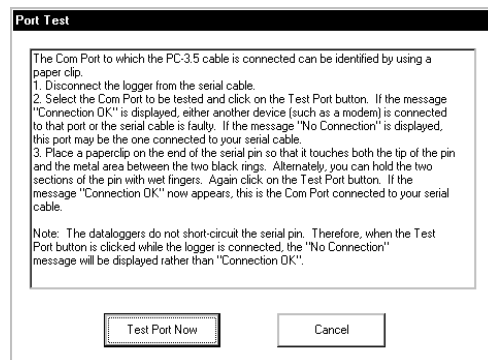

4. If the “Connection OK” message box (see fig. 1) is displayed, another device (such as a modem) is probably connected to that port. This is not the port you will be using with your meter. If the “No Connection” message box (see fig. 2) is displayed, this port may be the one connected to your serial cable and you can proceed to the next step.

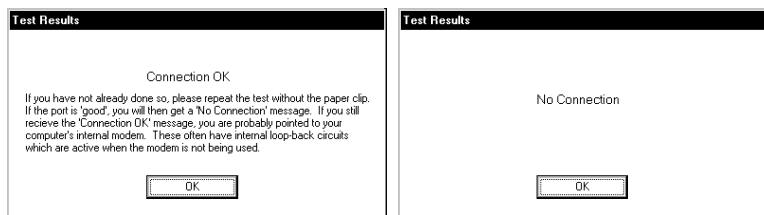


Figure 1

Figure 2

5. Place a paperclip on the end of the serial pin so that it touches both the tip of the pin and the metal area between the two black rings (see fig. 3). Again click on the **Test Port Now** button. If the message “Connection OK” now appears, this is the Com port connected to your serial cable.

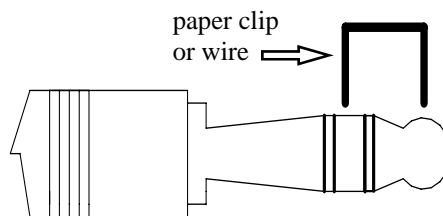


Figure 3

DATA LOGGER OPERATION

The data logger has two different modes of operation: **Communication** and **Measurement**. These modes are indicated by the green LED at the base of the meter. When this light is flashing, the meter is in **Communication** mode. When the light glows steadily, the meter is in **Measurement** mode.

Communication Mode

When the meter is turned on, it will be in **Communication** mode for approximately 10 seconds. While in this mode, the green LED will flash. It is only in this mode that a user can initiate a logger communication (download or reconfiguration). If communication between the logger and software is attempted during this 10-second period, the logger will remain in **Communication** mode indefinitely. The meter must be turned off and then on to change to **Measurement** mode (see following section).

Measurement Mode

Approximately 10 seconds after turning on the meter, the LED light will glow steadily. This indicates the logger is in **Measurement** mode. In this mode, you can calibrate the SPAD meter and record data. When you are finished collecting data, the meter must be put into **Communication** mode by turning it off and back on (see previous section). If you are collecting data from several sites and need to turn off the SPAD meter between data collection sessions, wait until the meter transitions from **Communication** to **Measurement** mode before resuming.

Calibration

The procedure for calibrating the meter is given in the accompanying meter instruction manual.

GPS CONNECTION

The data logger searches for a GPS signal when the meter is powered up. If a signal is found, latitude and longitude values will be added to the data file. If a GPS signal is **not** found when powering up, the meter will not search for it when taking readings. If the meter is turned off and back on, it will again search for the GPS signal. Be sure the meter is in **Measurement** mode (see p. 4) before taking any readings.

When taking a geo-referenced data measurement, the LED will turn off while collecting the GPS signal. The meter is again ready to take a reading when the LED returns to a steady glow. If the datalogger loses the GPS signal, the LED will flash briefly before returning to **Measurement** mode. In this case, check the GPS battery status as well as the connection to the data logger.

GPS Settings

Your GPS unit should be set to NMEA 0183 input/output messages. This standard requires your unit be set to the following:


GGA data string
4800 baud rate
Timing - 1 second
8 data bits
No parity
1 stop bit

Tip: If you have your GPS unit set properly and have checked the connection but still are not getting geo-referenced data, uncheck the box requiring the digital correction in Meter Settings (pp. 8 - 9) .

LOGGER SOFTWARE

Meter Type


The Field Scout software supports all of Spectrum Technologies' portable data logging meters. Be sure to select the SPAD Meter from the **Select Meter Type** screen

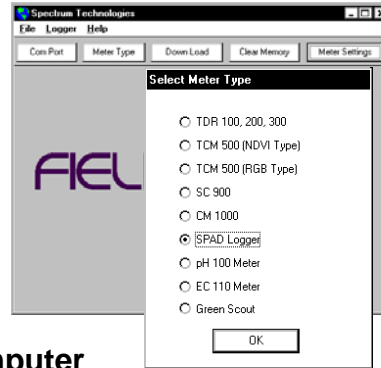

Connecting to your Computer

To communicate with the data logger, connect the gray interface cable to the SPAD meter's RS-232 port. The port is located at the bottom of the meter and is covered by a black cap. Open the software and turn on the meter so it is in **Communication** mode (see Data Logger Operation, p. 4). In order to communicate through your computer, the COM port assigned to your serial port must be selected. For most machines, this will be COM 1. If you are having trouble connecting, try selecting another COM port. This can be done by clicking the COM port toolbar button or by clicking "Select Comm Port" from the File menu.

Meter Settings

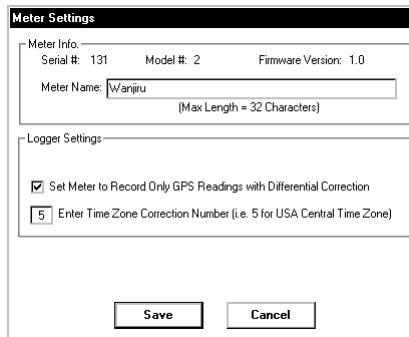


Clicking on this button will bring up the **Meter Settings** screen. This screen allows you to configure the data logger. The **Meter Name** will be the title on the first line of the downloaded files.

If the box below the logger name field is checked, the logger will store GPS data only if it has been differentially corrected. If the differential correction is not found, only the SPAD reading will be stored in the data file. A time zone correction should be entered in the last box. Appendix 1 (p. 13) lists time zone corrections for several cities.

Download

After clicking the **Download** button, a progress bar will confirm that data is being extracted from the logger. When completed, the **Save Data As** box will appear. From here you can give the data file a descriptive name and select a folder in which to save it. The folder selection field on the right allows you to browse to any folder in your system.

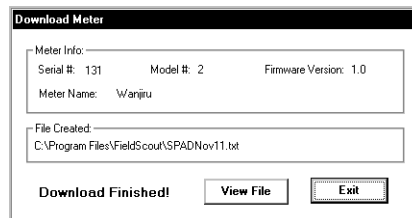

When the file has been saved, the software will give you the option of immediately viewing the file. The data file is stored as a comma-delimited text file and may be viewed in any text editor or spreadsheet software.

Clear Memory

Data is not automatically removed from the logger memory after a download. The **Clear Memory** button clears all data from the memory.

SPECIFICATIONS

Measurement Capacity:

- 1,488 data points with SPAD and DGPS
- 4,096 data points with SPAD

Operating Environment:

- Weather Resistant

Battery Life:

- 40 hours of logging

Software Requirements:

- Windows 3.1 or higher
- Field Scout Software (included)

APPENDIX 1

TIME ZONE CORRECTIONS

Time Zone Correction	City
0	Dublin, Lisbon, London
3	Rio de Janeiro, Montevideo
4	Asuncion
5	Atlanta, Indianapolis, New York, Ottawa, Bogota, Montreal, Toronto
6	Guatemala City, Houston, New Orleans, Chicago, Mexico City, Winnipeg
7	Phoenix, Denver, Edmonton
8	San Francisco, Los Angeles, Vancouver
9	Anchorage
10	Honolulu
11	Wellington
13	Adelaide, Melbourne, Sydney
14	Vladivostok, Brisbane
15	Seoul, Tokyo
16	Beijing, Hong Kong, Manila, Singapore, Taipei
17	Hanoi, Jakarta, Vientiane
18	Calcutta, New Delhi
19	Kabul, Islamabad
20	Tehran, Abu Dhabi, Dubai
21	Moscow, Nairobi, Kampala, Riyadh
22	Ankara, Athens, Helsinki, Istanbul, Cairo, Johannesburg, Harare
23	Amsterdam, Barcelona, Berlin, Geneva, Paris, Prague, Rome, Brussels, Madrid, Stockholm, Warsaw, Lagos

SERVICE AND SUPPORT

In the unlikely event that you have a problem with the hardware or software, please read the following.

Who do I contact?

Contact the company that you bought the loggers from: Spectrum Technologies, Inc. or a Spectrum Authorized Dealer.

Before calling, you can evaluate and often solve your problem if you try the following.

1. Read this manual and the help file in the software. It may only take a few moments to get the answer you need.
2. Write down the events that led to the problem. Have you changed anything in your computer recently? Are you doing anything differently?

When Contacting Spectrum Technologies, Inc. please indicate that you need Technical Support. Be prepared to:

1. Provide details on the hardware and software configuration of your computer including: manufacturer, model number, peripherals, and versions of the operating system.
2. Completely describe the problem. The more information you provide, the faster and more accurately we will be able to respond.

WARRANTY

This product is warranted to be free from defects in material or workmanship for 1 year from the date of purchase. During the warranty period Spectrum will, at its option, either repair or replace products that prove to be defective. This warranty is void if the Spectrum products have been damaged by customer error or negligence or if there has been an unauthorized modification.

Returning Products to Spectrum

Before returning a failed unit, you must obtain a Returned Goods Authorization (RGA) number from Spectrum. You must ship the product(s), properly packaged against further damage, back to Spectrum (at your expense) with the RGA number marked clearly on the outside of the package. Spectrum is not responsible for any package that is returned without a valid RGA number or for the loss of the package by any shipping company.



This equipment has been manufactured for
Spectrum Technologies, Inc.
12360 S. Industrial Dr. East
Plainfield, IL 60585 USA

The Manufacturer's **DECLARATION OF CONFORMITY** is on file at the above address, and certifies conformity to the following:

Model Number: 2900, 2900DL
Description: Chlorophyll Meter
Type: Electrical Equipment for Measurement, Control, and Laboratory Use

Directive: 2004/108/EC
Standards: EN 61326-1 (2006), Class B

Douglas L. Kieffer,
Soil/Water Products Manager

March 4, 2009

Spectrum
Technologies, Inc.

12360 S. Industrial Dr. East
Plainfield, IL 60585
(800) 248-8873 or (815) 436-4440
FAX: (815) 436-4460
E-Mail: info@specmeters.com
www.specmeters.com

R 05/09