TECHNICAL BULLETIN NO. 20120131 January 31, 2012

SUBJECT **Microcontroller Chip Installation Instructions**

PRODUCT FAMILY **Field Scout TDR 100, TDR 300**

DETAILS

1. Remove the Phillips-head screws from the face plate of the display.

2. Lift off the face plate.

3. Remove one battery from the battery holder.

4. The micro-controller is located between the 2 pairs of batteries. With a small screwdriver, carefully lift the chip out of the sockets.

5. Identify the side of the chip with the small dimple. This should align with the side of the socket that has the notch.

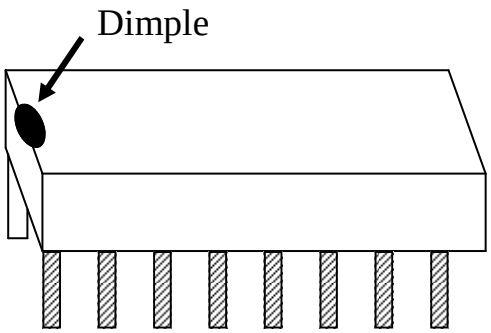

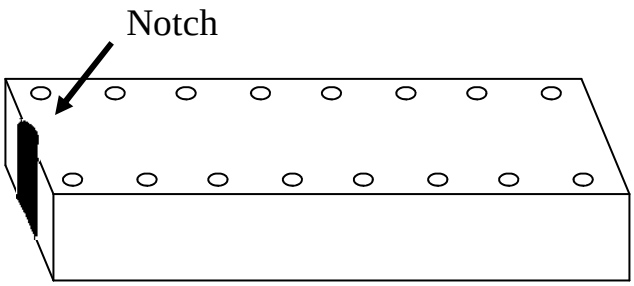

6. Carefully line up the pins and the socket and press the microcontroller until it snaps into the socket.

7. Re-insert the battery and re-attach the face plate.

12360 S. Industrial Drive, East - Plainfield,IL 60585
toll free: 800.248.8873 - phone: 815.436.4440 - fax: 815.436.4460 - email: info@specmeters.com